

MDTA Series


FEATURES

- Composite core material allows high saturation currents
- Very low acoustic noise and very low leakage flux noise
- High temperature capability and handles high transient currents
- C-Q200 qualified
- Operating temperature -55 to +155 °C (Including self - temperature rise)
- Quantity: 3000pcs



APPLICATION

- DC/DC converters for entertainment/navigation systems
- Applications: windshield power mirrors / heating and ventilation blowers / HID lighting
- LED driv

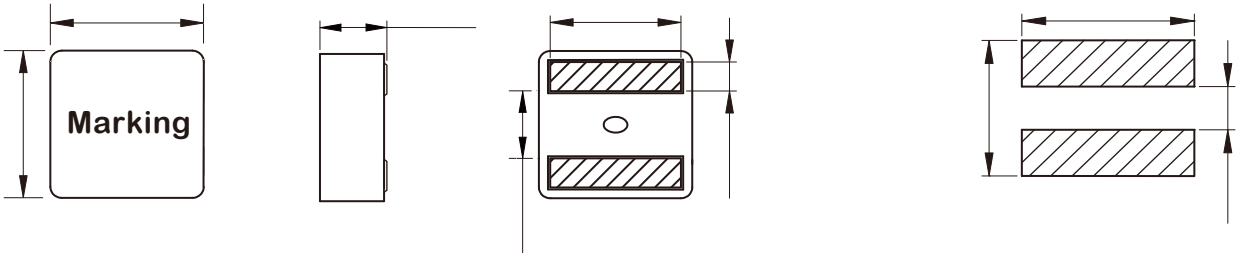


	(μH)		(A)	(A)		(mΩ)

℃
℃
℃

:

MDTA4020	4.5±0.1	4.5±0.1	1.5±0.1	4.0±0.1	8.0±0.1	12.0±0.3	2.3±0.1	1.75±0.1	0.35±0.05

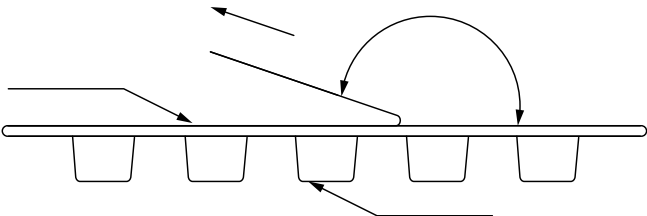

The peel force of top cover tape shall be between 0.1 to 1.3 N

:

