


**MDTA Series**  
 Flat Wire Molded Inductor  
 Size 6030



**FEATURES**

- 
- 
- 
- 
- 
- 
- 




°C

**APPLICATION**

- 
- 

Dimensions: [mm]


Land Pattern: [mm]



**Electrical Properties:**


Saturation Current will cause L to drop approximately 30%  
 Temperature Rise Current that causes the specified temperature rise from 25°C ambient.

## Soldering Reflow:

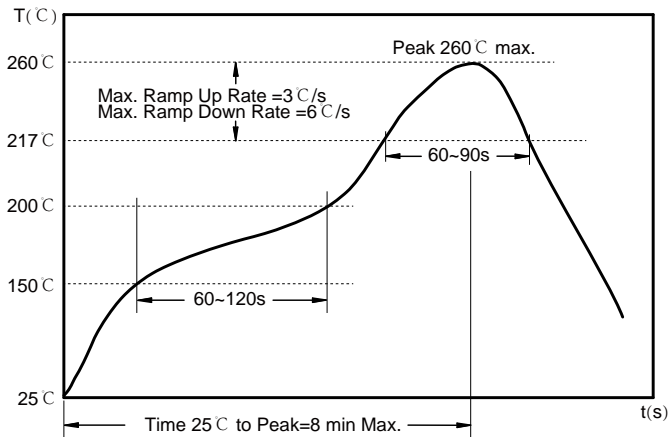

Preheat condition: 150 ~200°C / 60~120 sec.

Allowed time above 217°C : 60~90 sec.

Max temperature: 260°C .

Max time at max temperature: 10 sec.


Allowed Reflow time: 2x max.

## Packaging Information:

### Tape Dimension :

Series	A0 (mm)	B0 (mm)	D (mm)	P0 (mm)	P1 (mm)	W (mm)	K0 (mm)	E (mm)	T (mm)
MDTA6030	7.0± 0.1	6.8± 0.1	1.5± 0.1	4.0± 0.1	12.0± 0.1	16.0± 0.3	3.3± 0.1	1.75± 0.1	0.35± 0.05

### Peel force of top cover tape:

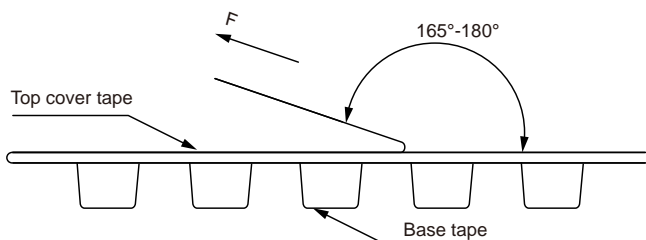


The peel force of top cover tape shall be between 0.1 to 1.3 N

### Product Marking:

Marking	Printing Inductance)
---------	----------------------

Reel Dimension: [mm]

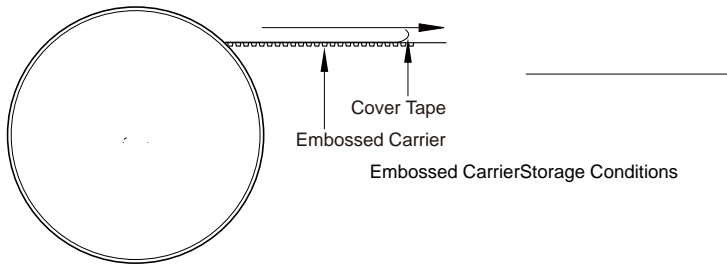

Packaging Quantity: