




Part No	Inductance (μH)	Tolerance	Saturation Current (A)	Temperature Rise Current (A)	DC Resistance ±30% (mΩ)	Test Condition
	33					


℃

℃

℃

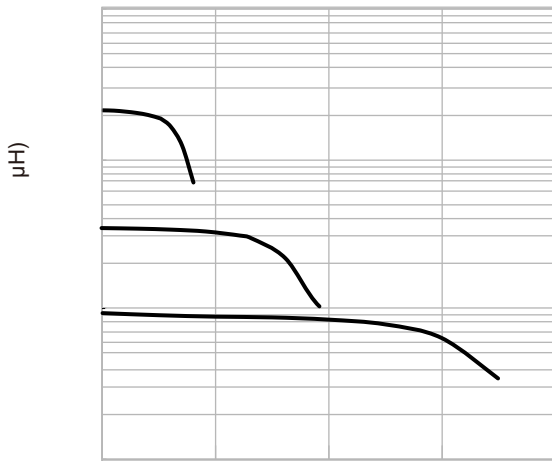


CURRENT(A)

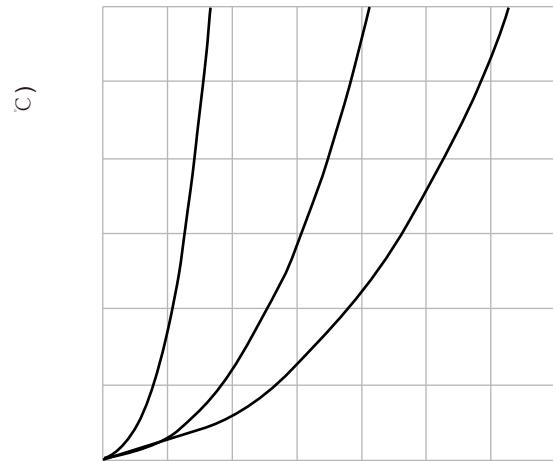


CURRENT(A)

:






	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)
NRSE3015	3.30±0.1	3.30±0.1	1.50±0.1	4.00±0.1	4.00±0.1	8.00±0.3	1.90±0.1	1.75±0.1	0.25±0.1

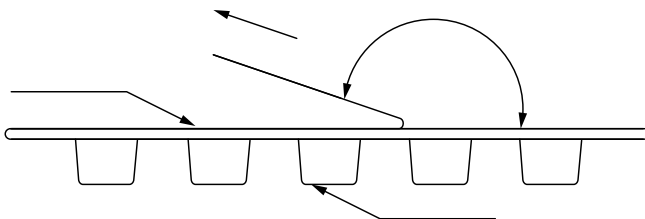

The peel force of top cover tape shall be between 0.14 to 0.88 N

:

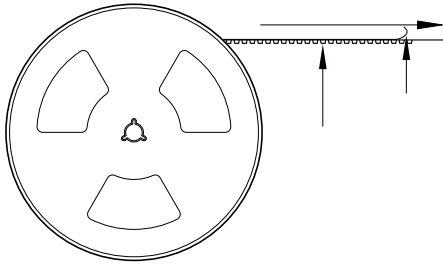

2000 Pcs/Reel

5 Reel /Inner box( 10K Pcs)

8 Inner box/Carton box(80K Pcs)

: